



25 Pack 14.5 W T8 4 ft LED Tube Light




Product Features

- **DLC listed.** Opportunity to get rebates.
- **Type A.** Works with extra electronic ballast. 17W in total. Plug and play.
- **High lumen.** 2200 lm.
- **High efficiency.** 150 lm/w. Save more electricity bill.
- **120-277 Voltage.**
- **No over-heating.**
- **UL Listed.** Safety guarantee.

Product Information


SKU	190007-DW-US-25	Power Consumption (W)	14.5
Brightness (lm)	2200	Fluorescent Equivalent(W)	32
LED Quantity	120	Light Color	Daylight White
Dimmable	Non-dimmable	CRI	> 80
Beam Angle (Degree)	150	Frequency (hz)	60
Power Factor	>0.9	Diameter (in)	1.1
Length (in)	48	Net Weight (lb)	0.46
Package Quantity	Pack of 25 Units	Warranty	5 Years

Product Dimensions

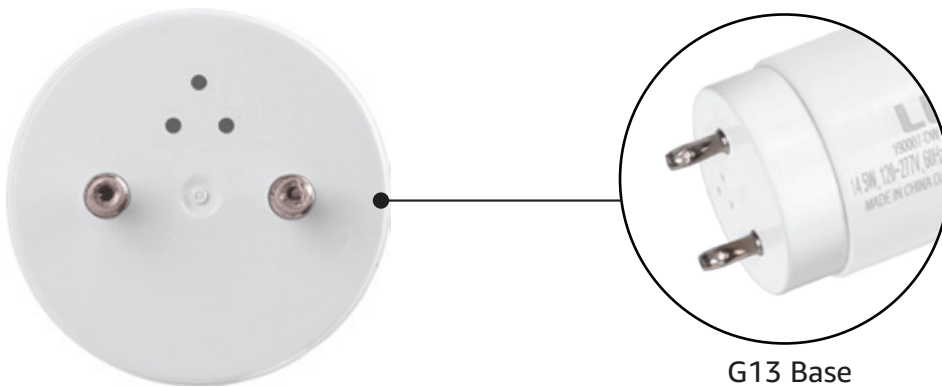

G13 Base

Installation

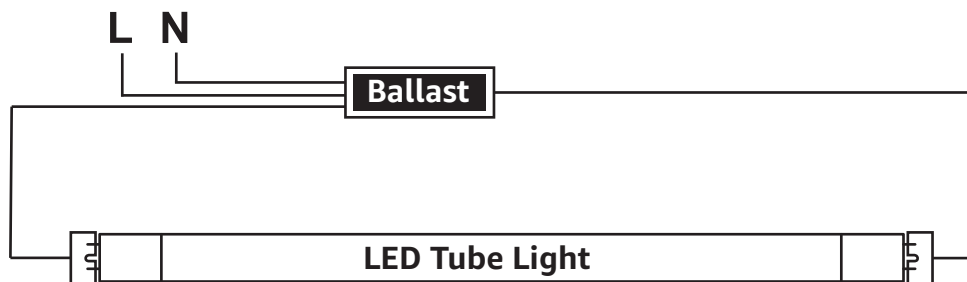

Photometric Data

OUTDOOR PHOTOMETRIC REPORT

MANUFACTURER: Lepro
SKU NO.: 190007-DW-US-25
LAMP OUTPUT: 1 lamp, rated Lumens/lamp: 2869.7
MAX CANADELA: 515.0 at Horizontal: 90°, Vertical: 7°
LUMINOUS OPENING: Point

LUMENS PER ZONE


ZONE	LUMENS	% TOTAL
0-1	48.5	6.5%
10-20	140.2	5.6%
20-30	216.7	4.7%
30-40	271.0	3.9%
40-50	299.6	3.2%
50-60	303.3	2.4%
60-70	285.7	1.7%
70-80	253.7	0.9%
80-90	216.9	0.2%

ILLUMINANCE AT A DISTANCE


	CENTER BEAM FC	BEAM WIDTH	
1 ft	511.57 fc	2.9 ft	20.6 ft
2 ft	127.89 fc	5.8 ft	41.1 ft
3 ft	56.84 fc	8.7 ft	61.7 ft
4 ft	31.97 fc	11.6 ft	82.2 ft
5 ft	20.46 fc	14.5 ft	102.8 ft
6 ft	14.21 fc	17.4 ft	123.3 ft
7 ft	10.44 fc	20.3 ft	143.9 ft
8 ft	7.99 fc	23.2 ft	164.4 ft
9 ft	6.32 fc	26.1 ft	185.0 ft
10 ft	5.12 fc	29.0 ft	205.5 ft
11 ft	4.23 fc	31.9 ft	226.1 ft
12 ft	3.55 fc	34.8 ft	246.7 ft
13 ft	3.03 fc	37.7 ft	267.2 ft

Vert. Spread: 110.8° Horiz. Spread: 168.9°


Polar Candela Distribution

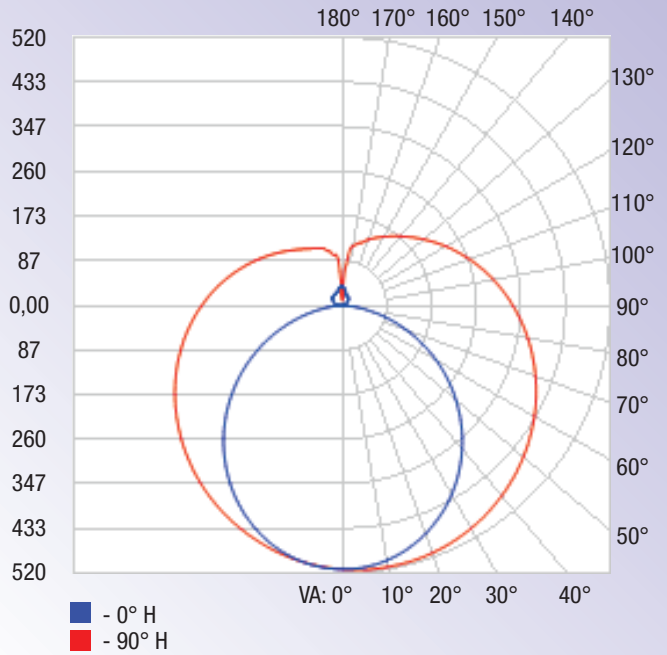

Isofootcandle Plot

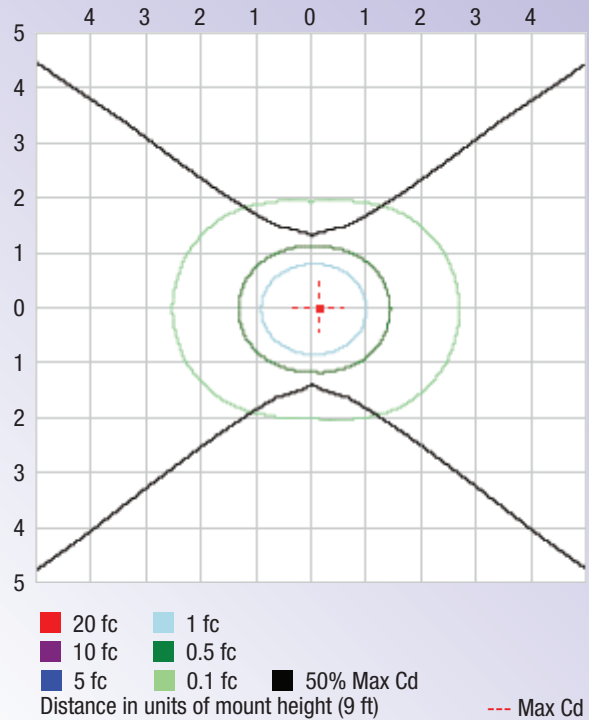

Other Models

SKU	Power (w)	Lumen (lm)	CCT	Input Voltage	Beam Angle	Life Hrs	CRI	Input	DLC	Website
190007-DW-US-25	14.5	2200	5,000 K	120-277 V	150°	50,000	>80	Direct Install Double-Ended	5.1	 Visit



190007-DW-US-25

