



## 100 W LED Flood Lights

### Product Features

- ETL certified. Safety guarantee.
- Energy Efficient: 250 W metal halide lamp equivalent.
- Save over 85% on your electricity bill.
- Wide Beam Angle: 120-degree wide beam angle.
- Waterproof Rating: IP65.
- Sufficient Brightness: 10,000 LM.
- Durable: fully aluminum alloy case.

## Product Information

SKU	340007-DW-US-2	Power Consumption (W)	100
Brightness (lm)	10,000	Metal Halide Equivalent(W)	250
LED Quantity	112	Light Color	Daylight White
Color Temperature (K)	5000	Dimmable	Non-dimmable
Beam Angle (Degree)	120	Input Voltage (v)	120V AC
Frequency (hz)	60	Power Factor	0.9
Lifespan (h)	15,000	Length (in)	12.79
Width (in)	9.21	Height (in)	1.49
Net Weight (lb)	8.73	Material	Glass, Aluminum
Waterproof	Yes	Protection Rating	IP65
Safety Rating	ETL	Package Quantity	Pack of 2 Units
Warranty	2 Years	Weight	8.73

## Product Dimensions



Photometric Data



[Download IES](#)

**OUTDOOR PHOTOMETRIC REPORT**

**MANUFACTURER:** Lepro  
**SKU NO.:** 340007-DW-US  
**MAX CANADELA:** 1,345.9 AT HORIZONTAL: 135°, VERTICAL: 4°  
**LUMINOUS OPENING:** RECTANGLE (L: 9.45", W: 5.12")  
**NEMA TYPE:** 7 X 7

**LUMENS PER ZONE**

ZONE	LUMENS	% TOTAL
0-10	292.0	3.8%
10-20	840.1	10.9%
20-30	1,285.5	16.6%
30-40	1,568.3	20.3%
40-50	1,610.8	20.9%
50-60	1,231.0	15.9%
60-70	634.1	8.2%
70-80	221.1	2.9%
80-90	41.7	0.5%

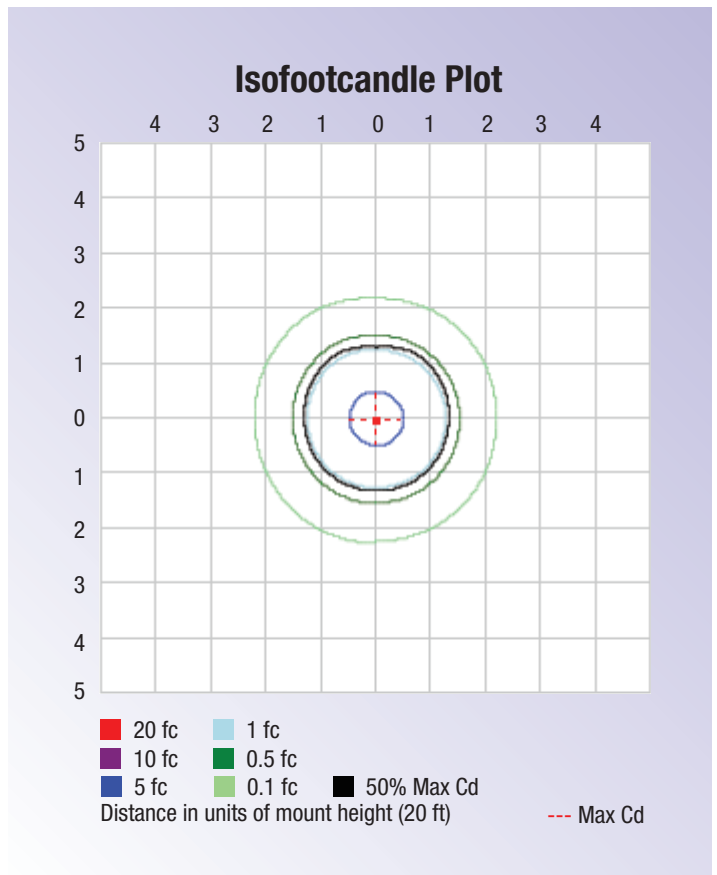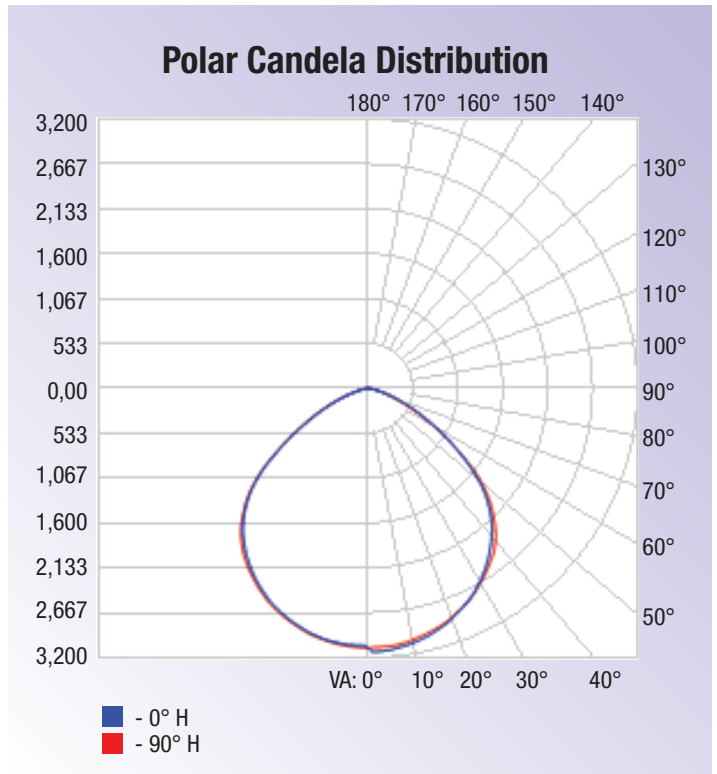

**ILLUMINANCE AT A DISTANCE**

	CENTER BEAM FC	BEAM WIDTH	
4 ft	192.71 fc	10.3 ft	10.5 ft
8 ft	48.18 fc	20.7 ft	21.0 ft
12 ft	21.41 fc	31.0 ft	31.4 ft
16 ft	12.04 fc	41.3 ft	41.3 ft
20 ft	7.71 fc	51.7 ft	51.7 ft

■ Vert. Spread: 104.5°     ■ Horiz. Spread: 105.3°

Other Models



SKU	Power (w)	Lumen (lm)	CCT	Voltage	Beam Angle	Life Hrs	CRI	Equivalent Power(w)	Website
340003-DW-US-2	50	5,000	5000 K	120 V	120°	15,000	70	175	<a href="#">Visit</a>
340007-DW-US-2	100	10,000	5000 K	120 V	120°	15,000	70	250	<a href="#">Visit</a>
340008-DW-US	150	15,000	5000 K	120 V	120°	15,000	70	400	<a href="#">Visit</a>
340009-DW-US	200	10,000	5000 K	120 V	120°	15,000	70	600	<a href="#">Visit</a>



340003-DW-US-2  
50 W



340007-DW-US-2  
100 W



340008-DW-US  
150 W



340009-DW-US  
200 W

