



## 200 W LED Flood Lights

### Product Features

- ETL certified. Safety guarantee.
- Energy Efficient: 600 W metal halide lamp equivalent.
- Save over 85% on your electricity bill.
- Wide Beam Angle: 120-degree wide beam angle.
- Waterproof Rating: IP65.
- Sufficient Brightness: 17000 LM.
- Durable: fully aluminum alloy case.

**Product Information**

SKU	340009-DW-US	Power Consumption (W)	200
Brightness (lm)	17000	HPS Equivalent(W)	600
Metal Halide Equivalent(W)	600	LED Quantity	252
Light Color	Daylight White	Dimmable	Non-dimmable
Beam Angle (Degree)	120	Input Voltage (v)	120V AC
Frequency (hz)	60	Power Factor	0.9
Lifespan (h)	15000	Length (in)	16.53
Width (in)	12.36	Height (in)	1.65
Net Weight (lb)	7.71	Material	Glass, Aluminum
Waterproof	Yes	Protection Rating	IP65
Safety Rating	ETL	Package Quantity	Pack of 1 Unit
Warranty	2 Years		

**Product Dimensions**



Photometric Data

[Download IES](#)


OUTDOOR PHOTOMETRIC REPORT

**MANUFACTURER:** Lepro  
**SKU NO.:** 340009-DW-US  
**MAX CANADELA:** 6,293.6 AT HORIZONTAL: 0°, VERTICAL: 1°  
**LUMINOUS OPENING:** RECTANGLE (L: 12.99", W: 7.09")  
**NEMA TYPE:** 7 X 7

LUMENS PER ZONE

ZONE	LUMENS	% TOTAL
0-10	579.9	3.7%
10-20	1,670.8	10.7%
20-30	2,558.8	16.3%
30-40	3,115.5	19.9%
40-50	3,194.2	20.4%
50-60	2,520.7	16.1%
60-70	1,390.9	8.9%
70-80	525.8	3.4%
80-90	99.2	0.6%

Polar Candela Distribution

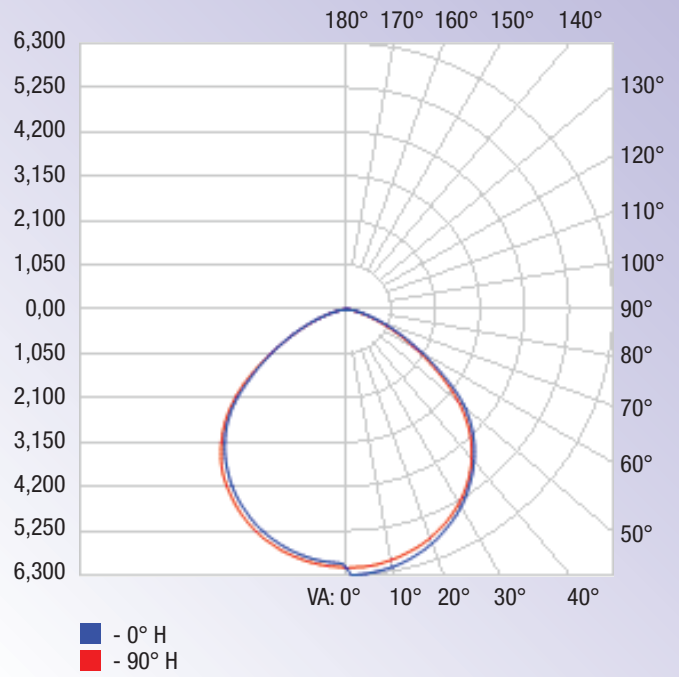


ILLUMINANCE AT A DISTANCE

	CENTER BEAM FC	BEAM WIDTH	
4 ft	383.30 fc	10.5 ft	10.5 ft
8 ft	95.82 fc	20.9 ft	21.1 ft
12 ft	42.59 fc	31.4 ft	31.6 ft
16 ft	23.96 fc	41.9 ft	42.2 ft
20 ft	15.33 fc	52.3 ft	52.7 ft

■ Vert. Spread: 105.2°     ■ Horiz. Spread: 105.6°

Isofootcandle Plot

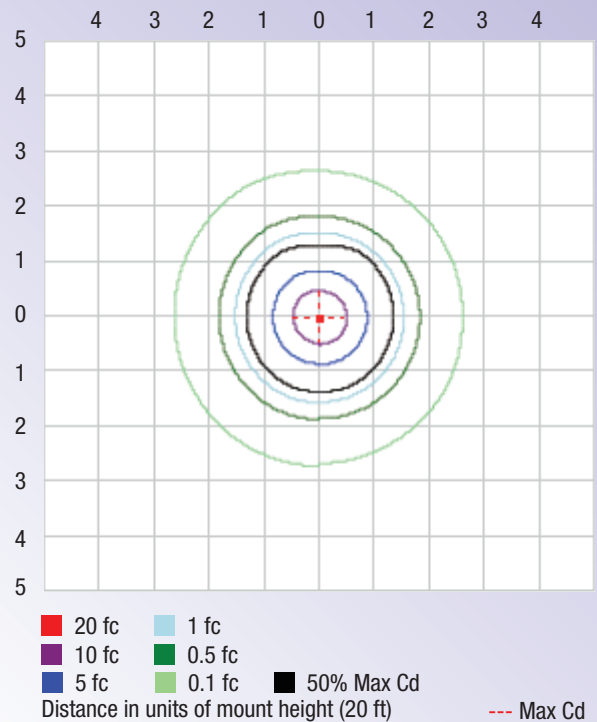

**Other Models**



SKU	Power (w)	Lumen (lm)	CCT	Voltage	Beam Angle	Life Hrs	CRI	Equivalent Power(w)	Website
340003-DW-US-2	50	4400	5000 K	120 V	120°	15,000	70	175	<a href="#">Visit</a>
340007-DW-US-2	100	8600	5000 K	120 V	120°	15,000	70	250	<a href="#">Visit</a>
340008-DW-US	150	13000	5000 K	120 V	120°	15,000	70	400	<a href="#">Visit</a>
340009-DW-US	200	17000	5000 K	120 V	120°	15,000	70	600	<a href="#">Visit</a>



**340003-DW-US-2**  
50 W

**340007-DW-US-2**  
100 W

**340008-DW-US**  
150 W

**340009-DW-US**  
200 W

