



## 150W UFO Dimmable High Bay LED Lights



### Product Features

- 400W metal halide lamp equivalent. Save 66% on electricity bill.
- Lumileds LED inside 5 years warranty.
- Dimmable. Work with 1-10V dimmer.
- Input voltage: 120-277V AC. Anti-surge protection. Flicker free.
- UL DLC certified. Opportunity to get rebates.
- Protection Rating: IP65


**Product Information**

SKU	350005-NW-US	EAN Code	4894495032464
Color Consistency (SDCM)	<6	Power Consumption (W)	150
Brightness (lm)	19000	Metal Halide Equivalent(W)	400
LED Quantity	270	Color Temperature (K)	5000
Dimmable	1-10 V	CRI	>80
Beam Angle (Degree)	120	Input Voltage (v)	120-277V AC
Frequency (hz)	50/60	Power Factor	>0.9
Lifespan (h)	50000	Diameter (in)	11.73
Height (in)	7.09	Net Weight (lb)	7.05
Material	Aluminum	Waterproof	Yes
Protection Rating	IP65	Safety Rating	UL
Package Quantity	Pack of 1 Unit	Warranty	5 Years
Energy Rating	DLC		

**Recommended 0-10 V Dimmer**

Brand	Lutron	Leviton	Legrand
Dimmer Type	0-10 V	0-10 V	0-10 V
Model	NTSTV-DV	DS710-10Z/IP710	RH4FBL3PW

**Product Dimensions**

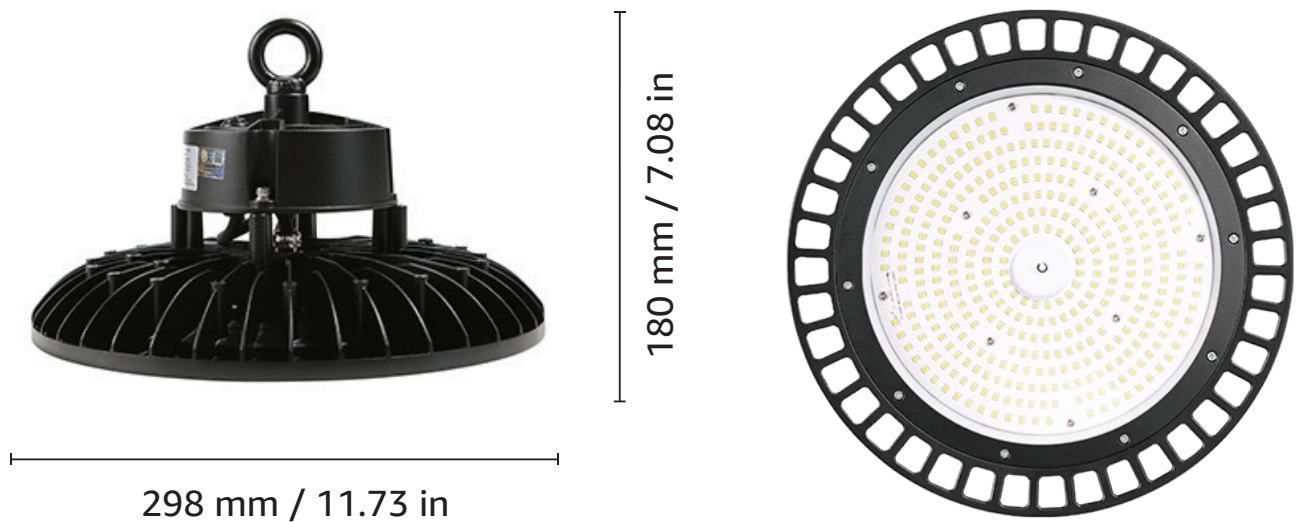

**Photometric Data**


[Download IES](#)

**OUTDOOR PHOTOMETRIC REPORT**

**MANUFACTURER:** Lepro  
**SKU NO.:** 350005-NW-US  
**LAMP OUTPUT:** 1 lamp, rated Lumens / lamp: 19059.1  
**MAX CANADELA:** 7,179.7 AT HORIZONTAL: 90°, VERTICAL: 1°  
**LUMINOUS OPENING:** Point  
**NEMA TYPE:** 7 X 7

**LUMENS PER ZONE**

ZONE	LUMENS	% TOTAL
0-1	671.3	3.5%
10-20	1,930.2	10.1%
20-30	2,948.2	15.5%
30-40	3,578.2	18.8%
40-50	3,704.0	19.4%
50-60	3,224.1	16.9%
60-70	2,120.4	11.1%
70-80	799.0	4.2%
80-90	63.4	0.3%

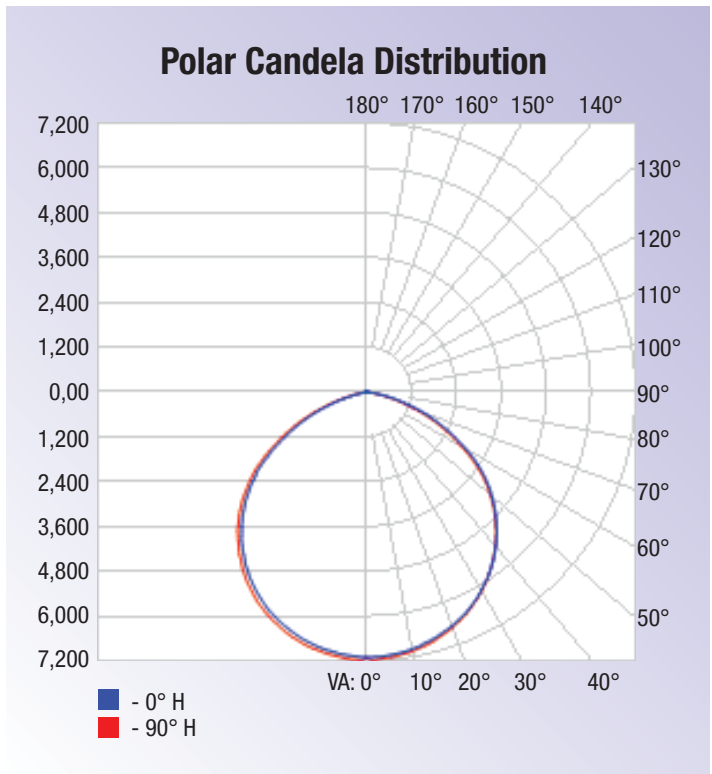


**ILLUMINANCE AT A DISTANCE**

	CENTER BEAM FC	BEAM WIDTH	
2 ft	1,776.20 fc	5.8 ft	5.8 ft
4 ft	444.05 fc	11.6 ft	11.7 ft
6 ft	197.36 fc	17.3 ft	17.5 ft
8 ft	111.01 fc	23.1 ft	23.4 ft
10 ft	71.05 fc	28.9 ft	29.2 ft
12 ft	49.34 fc	34.7 ft	35.1 ft
14 ft	36.25 fc	40.5 ft	40.9 ft
16 ft	27.75 fc	46.3 ft	46.8 ft
18 ft	21.93 fc	52.0 ft	52.6 ft
20 ft	17.76 fc	57.8 ft	58.5 ft
22 ft	14.68 fc	63.6 ft	64.3 ft
24 ft	12.33 fc	69.4 ft	70.2 ft
26 ft	10.51 fc	75.2 ft	76.0 ft

■ Vert. Spread: 110.7°    ■ Horiz. Spread: 111.2°

**Isofootcandle Plot**

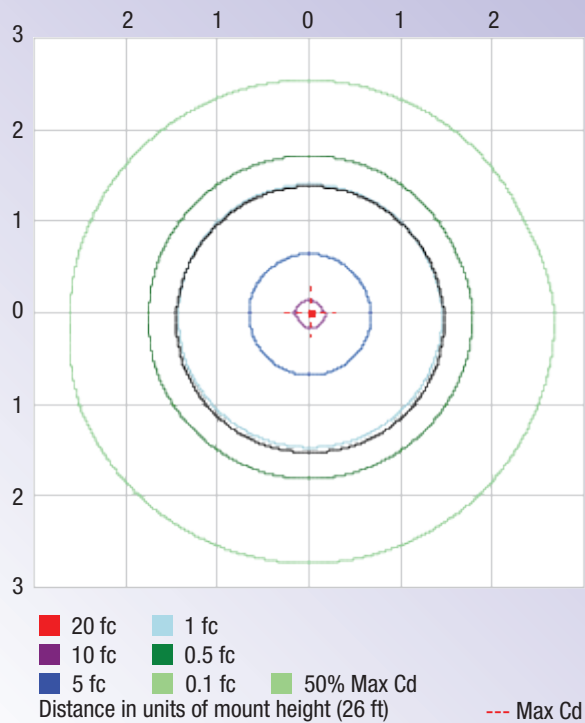

**Other Models**

SKU	Power (w)	Lumen (lm)	CCT	Input Voltage	Beam Angle	Life Hrs	CRI	Equivalent Power(w)	DLC	Website
350004-NW-US	100	13,000	5,000K	120-277 V	120°	50,000	80	300	std	<a href="#">Visit</a>
350005-NW-US	150	19,000	5,000K	120-277 V	120°	50,000	80	400	std	<a href="#">Visit</a>
350006-NW-US	240	32,000	5,000K	120-277 V	120°	50,000	80	600	std	<a href="#">Visit</a>



**350004-NW-US**  
**100 W**



**350005-NW-US**  
**150 W**



**350006-NW-US**  
**240 W**

