



## 240 W UFO Dimmable High Bay LED Lights



### Product Features

- 600W metal halide lamp equivalent. Save 60% on electricity bill.
- Lumileds LED inside 5 years warranty.
- Dimmable. Work with 1-10V dimmer.
- Input voltage: 120-277V AC. Anti-surge protection.
- UL DLC certified. Opportunity to get rebates.
- Protection Rating: IP65


**Product Information**

SKU	350006-NW-US	EAN Code	4894495032471
Color Consistency (SDCM)	<6	Power Consumption (W)	240
Brightness (lm)	32000	Metal Halide Equivalent(W)	600
LED Quantity	612	Color Temperature (K)	5000
Dimmable	1-10 V	CRI	>80
Beam Angle (Degree)	120	Input Voltage (v)	120-277V AC
Frequency (hz)	50/60	Power Factor	>0.9
Lifespan (h)	50000	Diameter (in)	14.17
Height (in)	8.43	Net Weight (lb)	10.36
Waterproof	Yes	Safety Rating	UL
Package Quantity	Pack of 1 Unit	Warranty	5 Years
Energy Rating	DLC		

**Recommended 0-10 V Dimmer**

Brand	Lutron	Leviton	Legrand
Dimmer Type	0-10 V	0-10 V	0-10 V
Model	NTSTV-DV	DS710-10Z/IP710	RH4FBL3PW

**Product Dimensions**

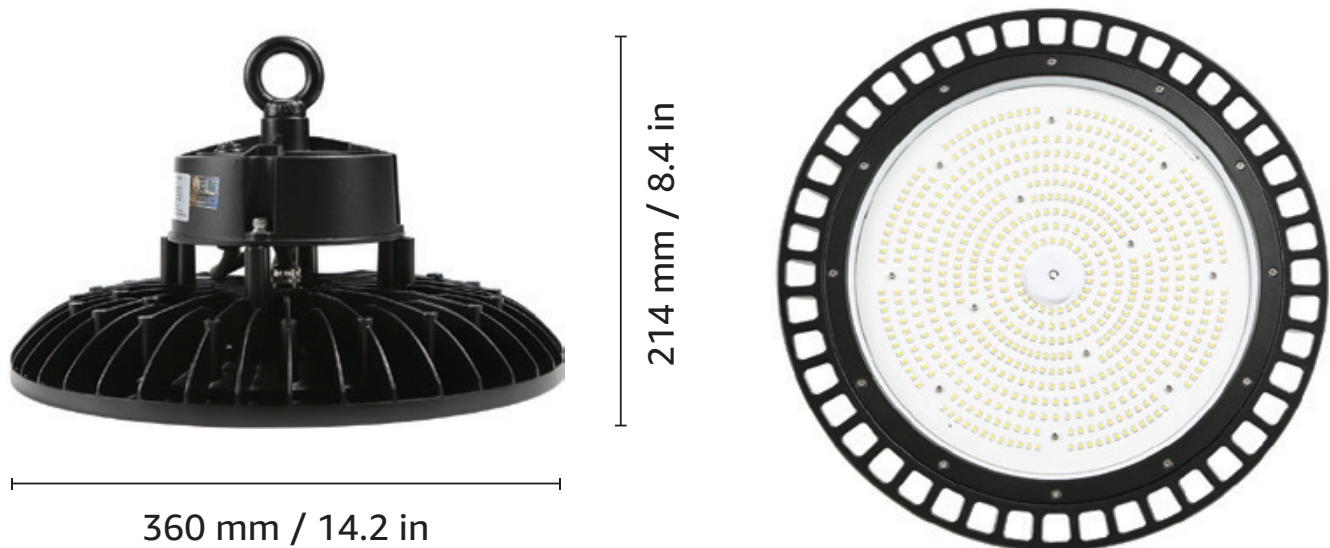

Photometric Data

[Download IES](#)


### OUTDOOR PHOTOMETRIC REPORT

**MANUFACTURER:** Lepro  
**SKU NO.:** 350006-NW-US  
**LAMP OUTPUT:** 1 lamp, rated Lumens / lamp: 31658.5  
**MAX CANADELA:** 11,792.0 AT HORIZONTAL: 270°,VERTICAL:1°  
**LUMINOUS OPENING:** Point  
**NEMA TYPE:** 7 X 7

#### LUMENS PER ZONE

ZONE	LUMENS	% TOTAL
0-1	1,102.8	3.5%
10-20	3,172.5	10.0%
20-30	4,844.8	15.3%
30-40	5,882.8	18.6%
40-50	6,094.1	19.2%
50-60	5,341.9	16.9%
60-70	3,639.0	11.5%
70-80	1,420.6	4.5%
80-90	127.1	0.4%

#### Polar Candela Distribution

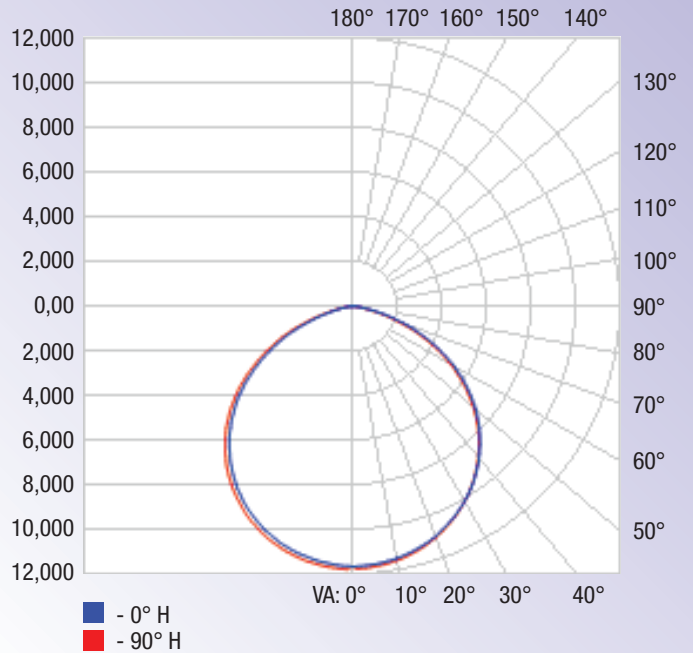


#### ILLUMINANCE AT A DISTANCE

	CENTER BEAM FC	BEAM WIDTH	
4 ft	728.65 fc	11.6 ft	11.7 ft
8 ft	182.16 fc	23.2 ft	23.5 ft
12 ft	80.96 fc	34.8 ft	35.2 ft
16 ft	45.54 fc	46.5 ft	47.0 ft
20 ft	29.15 fc	58.1 ft	58.7 ft
24 ft	20.24 fc	69.7 ft	70.5 ft
28 ft	14.87 fc	81.3 ft	82.2 ft
32 ft	11.39 fc	92.9 ft	94.0 ft
36 ft	9.00 fc	104.5 ft	105.7 ft

■ Vert. Spread: 110.9°    ■ Horiz. Spread: 111.5°

#### Isofootcandle Plot

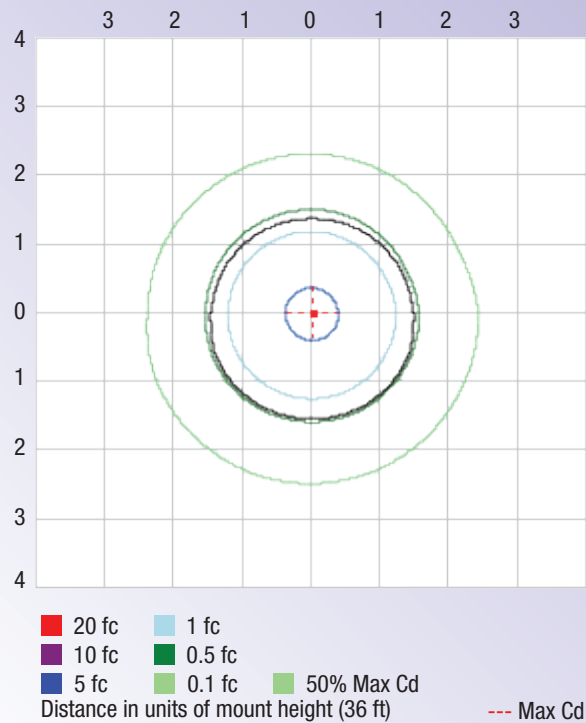

**Other Models**

SKU	Power (w)	Lumen (lm)	CCT	Input Voltage	Beam Angle	Life Hrs	CRI	Equivalent Power(w)	DLC	Website
350004-NW-US	100	13,000	5,000K	120-277 V	120°	50,000	80	300	std	<a href="#">Visit</a>
350005-NW-US	150	19,000	5,000K	120-277 V	120°	50,000	80	400	std	<a href="#">Visit</a>
350006-NW-US	240	32,000	5,000K	120-277 V	120°	50,000	80	600	std	<a href="#">Visit</a>



**350004-NW-US  
100 W**



**350005-NW-US  
150 W**



**350006-NW-US  
240 W**

