

165W Dimmable Linear High Bay LED Light



Product Features

- DLC certified. Opportunity to get rebates.
- 5 years warranty.
- 400W metal halide lamp equivalent. Save 60% on electricity bill.
- Dimmable. Work with 1-10 V dimmer.
- Flicker free.
- Input voltage: 120-277 V AC. Anti-surge protection.
- Lumileds LED inside
- Come with rope sling. Easy to install
- UL certified. Safety guarantee


Product Information

SKU	350007-NW-US	EAN Code	4894495032433
Power Consumption (W)	165	Brightness (lm)	22000
Metal Halide Equivalent(W)	400	LED Quantity	504
Color Temperature (K)	5000	Dimmable	1-10 V
CRI	80	Beam Angle (Degree)	110
Input Voltage (v)	120-277V AC	Frequency (hz)	50/60
Power Factor	>0.9	Lifespan (h)	50000
Length (in)	24.8	Width (in)	11.81
Height (in)	1.89	Net Weight (lb)	6.17
Material	Aluminum	Waterproof	No
Protection Rating	IP20	Safety Rating	UL
Package Quantity	Pack of 1 Unit	Warranty	5 Years
Energy Rating	DLC		

Recommended 0-10 V Dimmer

Brand	Lutron	Leviton	Legrand
Dimmer Type	0-10 V	0-10 V	0-10 V
Model	NTSTV-DV	DS710-10Z/IP710	RH4FBL3PW

Product Dimensions

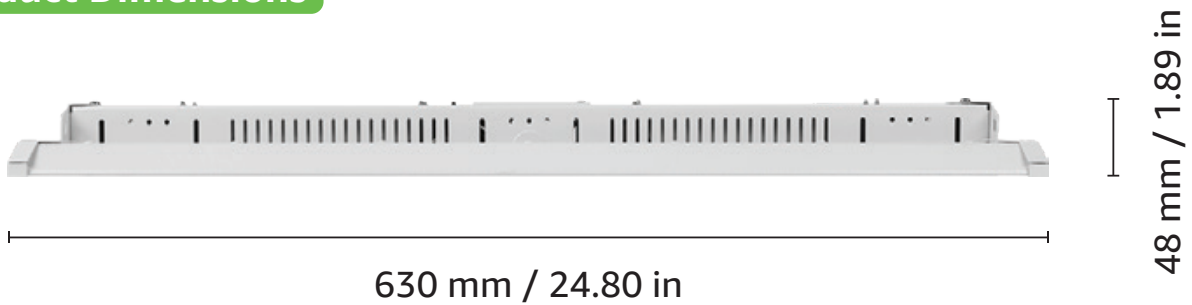

Photometric Data

[Download IES](#)


OUTDOOR PHOTOMETRIC REPORT

MANUFACTURER: Lepro
SKU NO.: 350007-NW-US
LAMP OUTPUT: 1 LAMP, RATED LUMENS/LAMP: 22624.1
MAX CANADELA: 8,768.5 AT HORIZONTAL: 135°, VERTICAL: 1°
LUMINOUS OPENING: Point
NEMA TYPE: 7 X 7

LUMENS PER ZONE

ZONE	LUMENS	% TOTAL
0-10	827.9	3.7%
10-20	2,359.6	10.4%
20-30	3,529.7	15.6%
30-40	4,137.2	18.3%
40-50	4,093.1	18.1%
50-60	3,473.9	15.4%
60-70	2,474.6	10.9%
70-80	1,329.6	5.9%
80-90	315.0	1.4%

Polar Candela Distribution

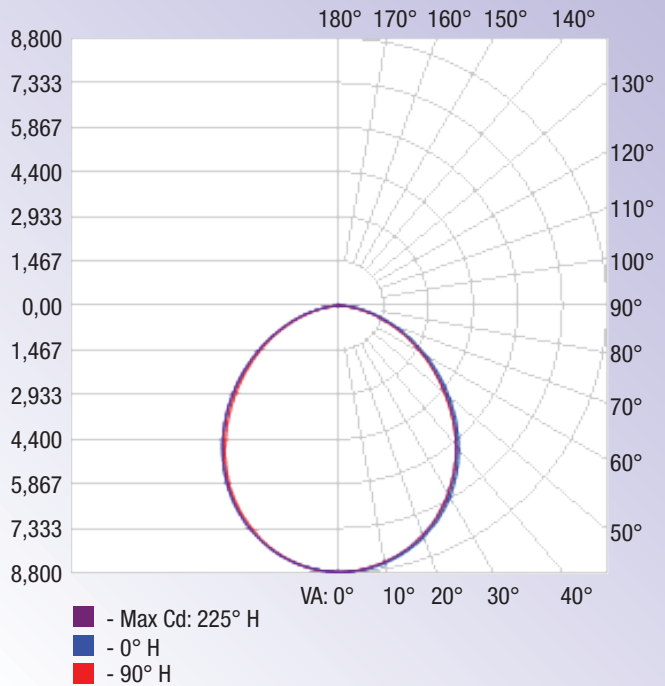


ILLUMINANCE AT A DISTANCE

	CENTER BEAM FC	BEAM WIDTH
6 ft	243.40 fc	14.6 ft 15.3 ft
12 ft	60.85 fc	29.3 ft 30.7 ft
18 ft	27.04 fc	43.9 ft 46.0 ft
24 ft	15.21 fc	58.5 ft 61.4 ft
30 ft	9.74 fc	73.2 ft 76.7 ft
36 ft	6.76 fc	87.8 ft 92.0 ft

Vert. Spread: 101.3° Horiz. Spread: 103.9°

Isofootcandle Plot

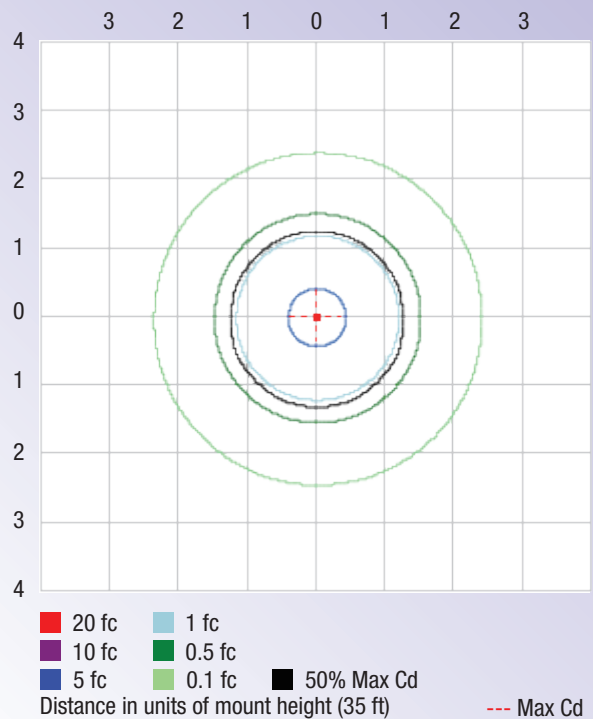

Other Models

SKU	Power (w)	Lumen (lm)	CCT	Input Voltage	Beam Angle	Life Hrs	CRI	Equivalent Power(w)	DLC	Website
350007-NW-US	165	22,000	5000 K	120-277 V	110°	50,000	80	400	std	Visit
350008-NW-US	220	30,000	5000 K	120-277 V	110°	50,000	80	500	std	Visit



350007-NW-US
165 W



350008-NW-US
220 W

