



120W Lepro LED Wall Pack Light with Photocell



Product Features

- Photocell included, automatically turn on/off from dusk to dawn.
- 600W metal halide equivalent, save 70% energy.
- Input voltage: 100-277 V AC. Lumileds LED inside.
- Waterproof IP65. 5 years warranty.
- DLC certified. Available to get rebates.

Product Information

SKU	630011-NW-US	Power Consumption (W)	120
Brightness (lm)	17400	Metal Halide Equivalent (W)	600
LED Quantity	420	Light Color	Neutral White
Color Temperature (K)	5000	Dimmable	Dimmable
CRI	80	Beam Angle (Degree)	100
Input Voltage (v)	100-277V AC	Frequency (hz)	50/60
Power Factor	0.9	Lifespan (h)	50000
Length (in)	14.37	Width (in)	9.33
Height (in)	7.36	Net Weight (lb)	7.72
Material	Glass, Aluminum	Waterproof	Yes
Protection Rating	IP65	Safety Rating	UL, FCC
Package Quantity	Pack of 1 Unit	Warranty	5 Years
Energy Rating	DLC5.1		

Product Dimensions



Photometric Data



[Download IES](#)

OUTDOOR PHOTOMETRIC REPORT

MANUFACTURER: LEPRO
SKU NO.: 630011-NW-US
DESCRIPTION: LED WALL LIGHT 120W IP65 IK06 17,400LM 5000K
LAMP OUTPUT: 1 lamp, rated Lumens/lamp: 17400
INPUT WATTAGE: 120
LUMINOUS OPENING: Rectangle w/Luminous Sides
 (L: 3.35", W: 13.19", H: 6.3")
NEMA TYPE: 7 X 6
MAX CD: 7,538.2 at Horizontal: 0°, Vertical: 50°
CUTOFF CLASS: Noncutoff
ROADWAY CLASS: VERY SHORT, TYPE IV
EFFICIENCY: 100%

LUMENS PER ZONE

ZONE	LUMENS	% TOTAL	ZONE	LUMENS	% TOTAL
0-10	330.3	1.90%	90-100	976.7	5.60%
10-20	919.3	5.30%	100-110	526.9	3%
20-30	1,418.80	8.20%	110-120	302.1	1.70%
30-40	1,874.40	10.80%	120-130	166.6	1%
40-50	2,214.70	12.70%	130-140	89.6	0.50%
50-60	2,354.70	13.50%	140-150	43.8	0.30%
60-70	2,341.90	13.50%	150-160	19.3	0.10%
70-80	2,132.00	12.30%	160-170	8.3	0%
80-90	1,678.40	9.60%	170-180	2.7	0%

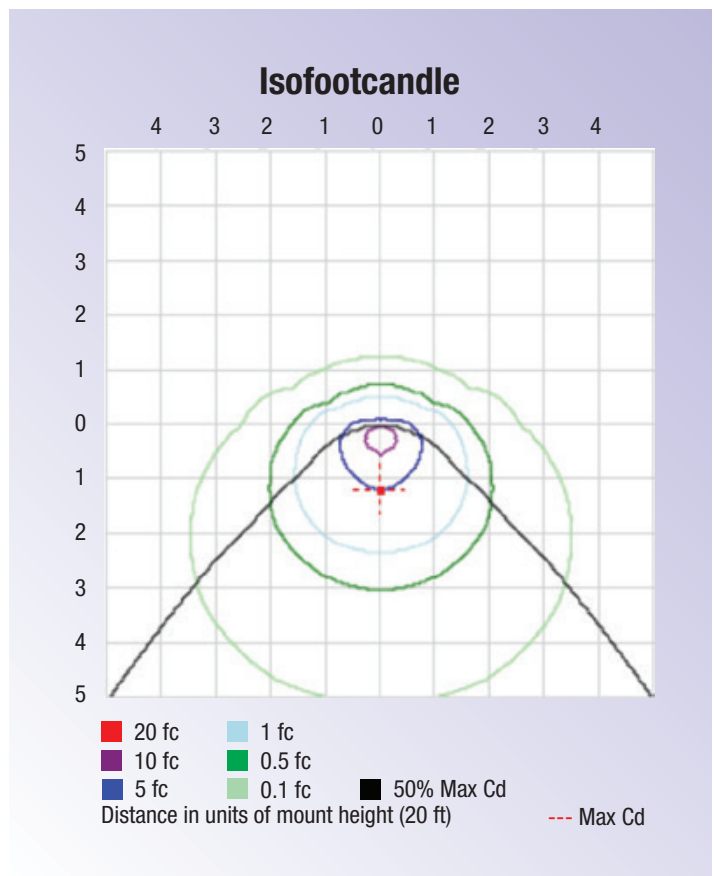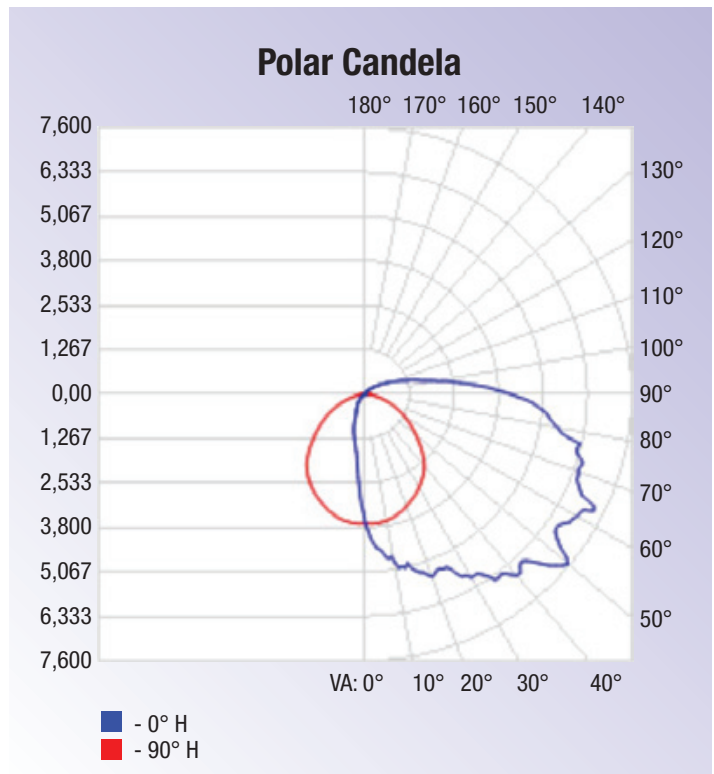

ILLUMINANCE AT A DISTANCE

	CENTER BEAM FC	BEAM WIDTH	
4 ft	230.50 fc	7.9 ft	9.3 ft
8 ft	57.63 fc	15.9 ft	18.6 ft
12 ft	25.61 fc	23.8 ft	27.9 ft
16 ft	14.41 fc	31.8 ft	37.2 ft
20 ft	9.22 fc	39.7 ft	46.5 ft

■ Vert. Spread: 89.6° ■ Horiz. Spread: 98.6°

Other Models

SKU	Power (W)	Lumen (lm)	CCT	Voltage	Beam Angle	Life Hrs	CRI	MH Equivalent(W)	DLC	Website
630009-NW-US	40	5,600	5000K	100-277V	100°	50,000	80	200	5.1	Visit
630010-NW-US	80	11,600	5000K	100-277V	100°	50,000	80	400	5.1	Visit
630011-NW-US	120	17,400	5000K	100-277V	100°	50,000	80	600	5.1	Visit



630009-NW-US
40 W



630010-NW-US
80 W



630011-NW-US
120 W

