



## 40 W 4 ft LED Shop Lights




### Product Features

- Energy star listed. Opportunity to get rebates.
- 5 years warranty.
- High efficiency 100 lm/w.
- 100 W fluorescent tube equivalent. Save 60% on electricity bill.
- ETL certified. Safety guarantee.
- Max connection: 8 units.
- Installation accessories included.

## Product Information

SKU	880001-NW-US	EAN Code	4894495032358
Color Consistency (SDCM)	<6	Power Consumption (W)	40
Brightness (lm)	4000	Fluorescent Equivalent(W)	100
Light Color	Daylight White	Color Temperature (K)	5000
Dimmable	Non-dimmable	CRI	>80
Beam Angle (Degree)	120	Frequency (hz)	60
Power Factor	>0.9	Lifespan (h)	50000
Length (in)	43.3	Width (in)	3.14
Height (in)	1.69	Net Weight (lb)	1.54
Material	Plastic	Power Srouce	AC
Protection Rating	IP20	Safety Rating	FCC, ETL
Package Quantity	Pack of 1 Unit	Warranty	5 Years
Energy Rating	Energy Star		

## Product Dimensions

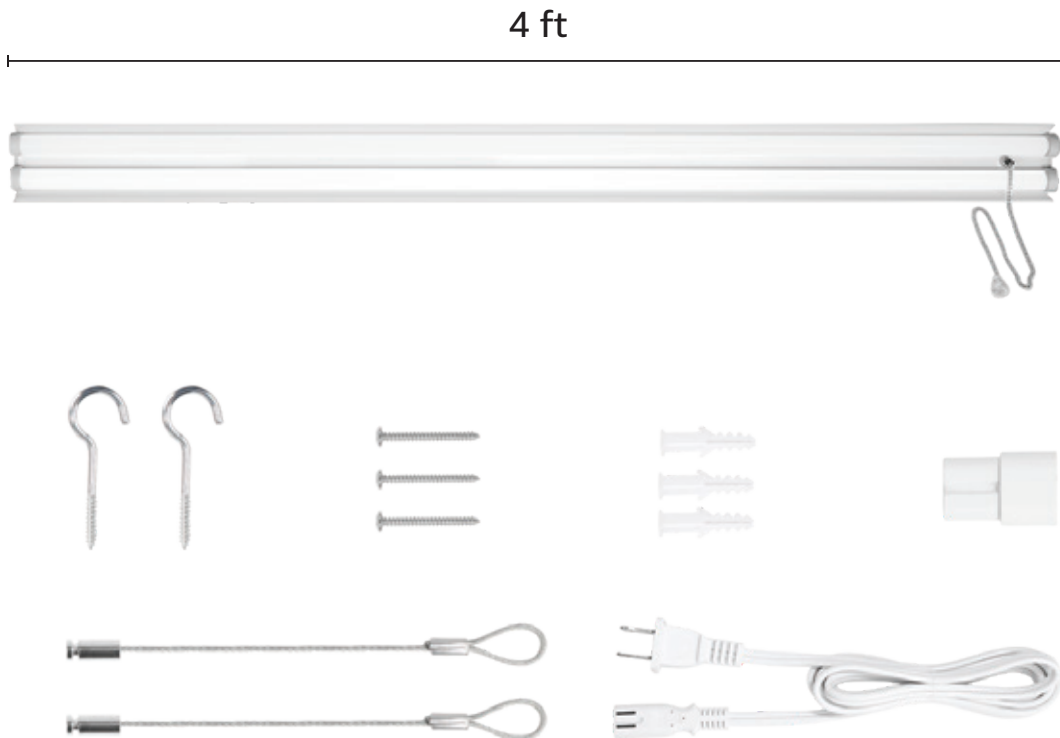

Photometric Data

[Download IES](#)


### OUTDOOR PHOTOMETRIC REPORT

**MANUFACTURER:** Lepro  
**SKU NO.:** 880001-NW-US  
**LAMP OUTPUT:** 1 LAMP, RATED LUMENS/LAMP: 4212.6  
**MAX CANADELA:** 1,345.9 AT HORIZONTAL: 135°, VERTICAL: 4°  
**LUMINOUS OPENING:** RECTANGLE (L: 90.55", W: 2.52")  
**NEMA TYPE:** 7 X 7


#### LUMENS PER ZONE

ZONE	LUMENS	% TOTAL
0-10	127.3	3.0%
10-20	366.2	8.7%
20-30	561.0	13.3%
30-40	691.3	16.4%
40-50	742.8	17.6%
50-60	699.6	16.6%
60-70	554.6	13.2%
70-80	332.2	7.9%
80-90	103.7	2.5%

#### Polar Candela Distribution

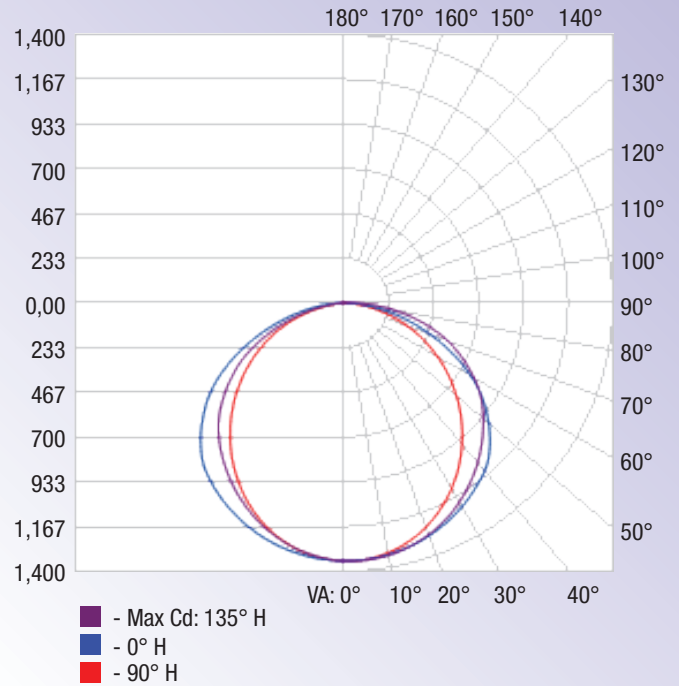

#### Isofootcandle Plot

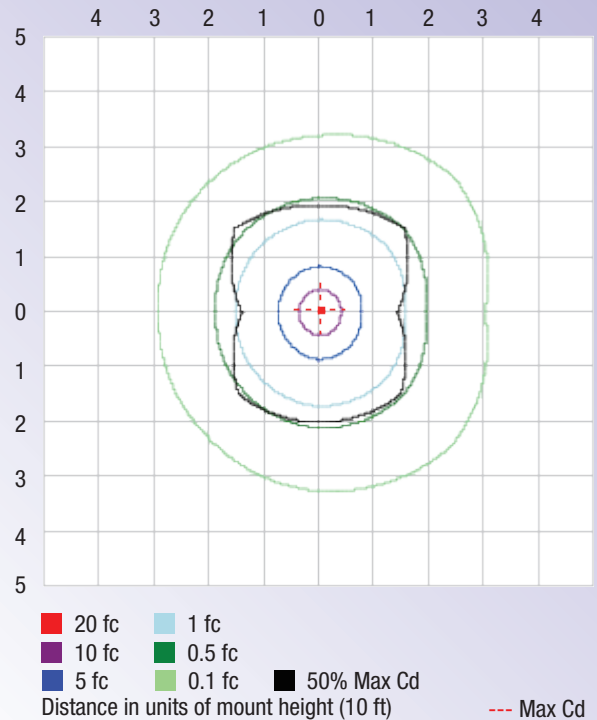


#### ILLUMINANCE AT A DISTANCE

	CENTER BEAM FC	BEAM WIDTH	
1 ft	1,343.78 fc	2.8 ft	3.9 ft
2 ft	335.95 fc	5.5 ft	7.8 ft
3 ft	149.31 fc	8.3 ft	11.8 ft
4 ft	83.99 fc	11.1 ft	15.7 ft
5 ft	53.75 fc	13.8 ft	19.6 ft
6 ft	37.33 fc	16.6 ft	23.5 ft
7 ft	27.42 fc	19.4 ft	27.4 ft
8 ft	21.00 fc	22.1 ft	31.4 ft
9 ft	16.59 fc	24.9 ft	35.3 ft

Vert. Spread: 108.3°      Horiz. Spread: 125.5°

Summary

SKU	Power (w)	Lumen (lm)	CCT	Input Voltage	Beam Angle	Life Hrs	CRI	Equivalent Power(w)	Website
880001-NW-US	40	4000	5000K	120-277V	120°	50,000	80	100	 <a href="#">Visit</a>



880001-NW-US  
40 W

