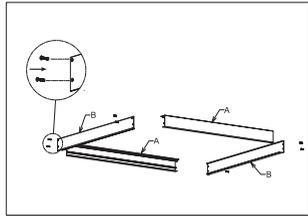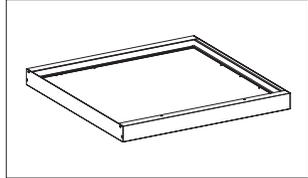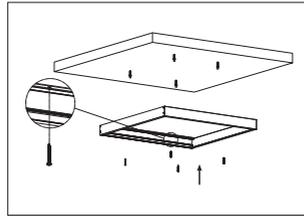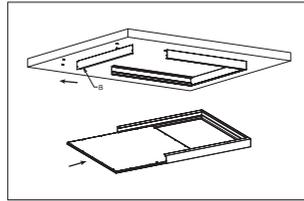## Surface mounted

① Assemble the surface mounted frame and fix by screws.

② knock the plastic anchor into ceiling, fix the surface mounted frame on the ceiling by screws.
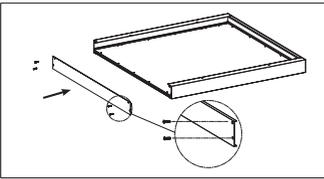
③ Unscrew the side frame then take out, connect the panel light to power supply, insert the panel light into the frame.
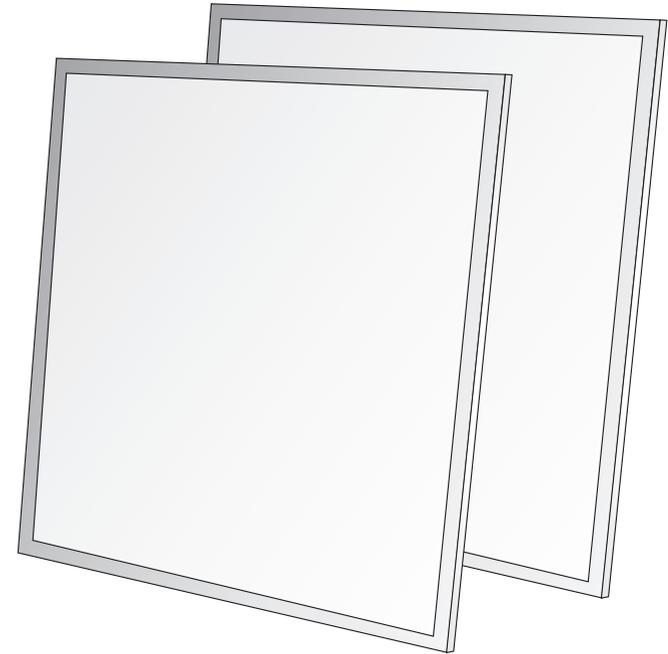
④ Fix the side frame back by screw.

⑤ Make sure the frame and panel light are firmly fixed, turn on the power.

Warning:

Product modification and improper installation are not valid for warranty!

LED PANEL LIGHT USER GUIDE

LED PANEL LIGHT USER GUIDE

LE PRO

Safety Instruction:

Basic safety precautions should always be followed when installing, including the following:
1. Read instructions carefully before installing.
2. This LED Panel requires professional installation and maintenance.
3. The power supply of the LED Panel should be powered by a dedicated external LED driver.
4. Disconnect the power supply before installing or maintenance.
5. Make sure the wires have been properly connected before powering on the device.
6. Ensure the product has enough space for heat dissipation.
7. Ensure the luminaries are never covered by any heat insulation mat or slim layer material at anytime.
8. This product is to be installed by a qualified electrician only.
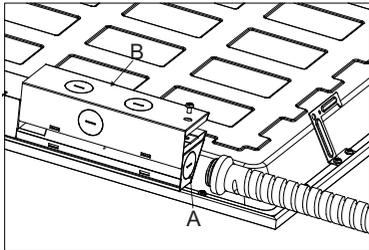9. Suitable for damp location use.

Installation Procedure

⚡ WARNING:

1.Switch off before installation.
2.Switch on only after complete installation and examination of the circuit.
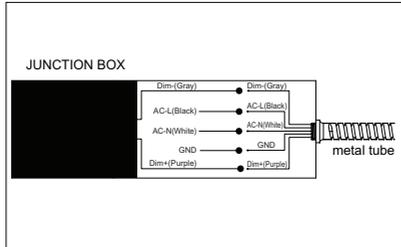
Turn Off Power Supply

⚠ CAUTION:

Make sure that the mounting surface or structural member used for installation can support the weight of LED Panel.

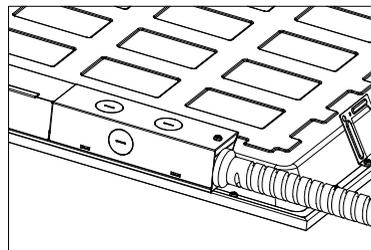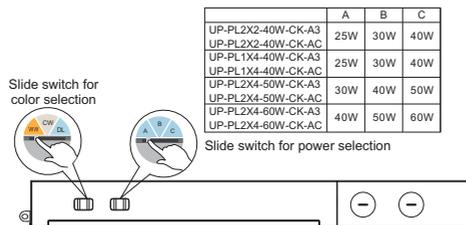(1) Remove the knock-down hole on box by screwdriver (Part A),Remove screw and take out the driver cover (Part B)

JUNCTION BOX

Dim-(Gray)	Dim-(Gray)
AC-L(Black)	AC-L(Black)
AC-N(White)	AC-N(White)
GND	GND
Dim+(Purple)	Dim+(Purple)

metal tube

(2) Connect the wire as the picture showing.

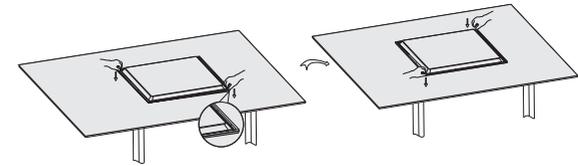(3) Cover the driver box and tighten it with a screwdriver,finish connection.

For the product with Slide Switch of CCT or power selection, please select the CCT or power needed before installation. (Ignore these steps if without the function)
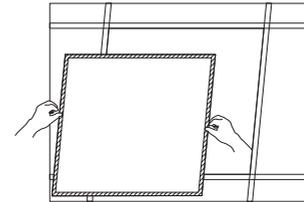
Slide switch for color selection

WW CW DL

A B C

Slide switch for power selection

	A	B	C
UP-PL2X2-40W-CK-A3 UP-PL2X2-40W-CK-AC	25W	30W	40W
UP-PL1X4-40W-CK-A3 UP-PL1X4-40W-CK-AC	25W	30W	40W
UP-PL2X4-50W-CK-A3 UP-PL2X4-50W-CK-AC	30W	40W	50W
UP-PL2X4-60W-CK-A3 UP-PL2X4-60W-CK-AC	40W	50W	60W

Lamp inspection before installation:Take out the lamp from the box and put it in a flat table,if the lamp upwarps, please adjust the lamp with below steps before installation:
1.Press the oposite angles at the same time;
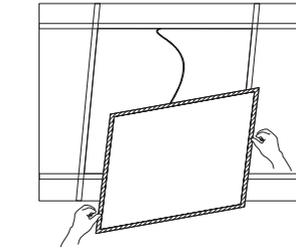2.Press another two oposite angles at the same time, make sure the four angles are flat, then start the installation.
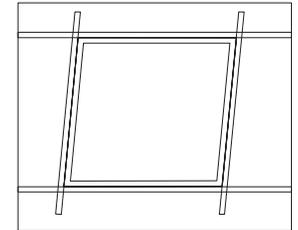

Recessed

① Remove the ceiling plaster slab.

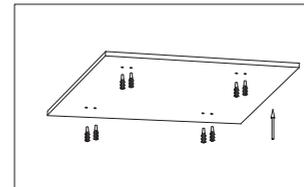② Feed the main AC wire in driver terminal block respectively, connect the panel light and driver.

③ Fix the panel light into plaster ceiling.

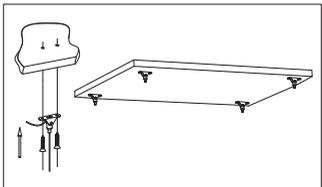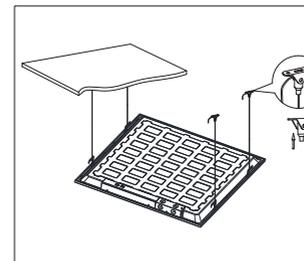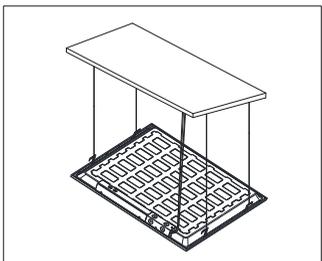④ Make sure the led panel light is firmly fixed, turn on the power.

Suspended

① Fix the anchor into target place on the ceiling.

② Fix the installation mount on the ceiling with plastic anchor.

③ Hang the panel to ceiling with suspended installation kits,adjust the length of steel wires.

④ Feed the main AC wire in driver terminal block respectively, turn on the power.